


Combat[®]

Energy-Saving Fans with Control Options

Improving comfort, protecting the environment and saving money!

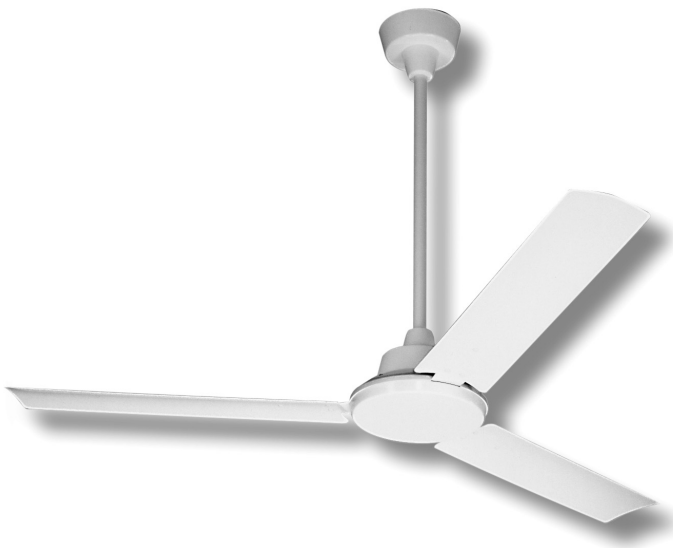


- Improves heating system efficiency by keeping valuable warm air down at working level, and reducing heat losses through the roof structure
- Easy to install and operate
- Ease of use provided by automatic or manual speed controls
- Flexibility provided by wide range of units to suit most applications

Technical Data - HVE Range

Model		HVE 400	HVE 450	HVE 650
Air Capacity	(m ³ /sec) (ft ³ /min)	1.1 2430	1.8 3750	3.0 6360
Fan Diameter	(mm)	400	500	650
Motor Speed	(RPM)	1400	1430	890
Motor Size	(W)	165	410	370
Electrical Load	(W)	179	621	598
Capacitor	(µF)	3	10	12
Electrical Supply		230 V/50 Hz/1 Ø		
Starting Current	(A)	1.5	10	6
Running Current	(A)	0.8	2.7	2.6
Noise Level @ 3m	NR dB(A)	55	68	70
Maximum Ambient Temperature	(°C)	60	50	40
Thermostat				
Recommended Minimum Setting	(°C)	15	15	15
Maximum Setting	(°C)	30	30	30
Recommended Setting Above Set Room Temperature	(°C)	3	3	3

Dimensional Data - HVE Range

Model		HVE 400	HVE 450	HVE 650
'A' Depth	(mm)	284	355	284
'B' Casing Width	(mm)	527	610	790
'C' Overall Width	(mm)	582	665	845
Weight	(kg)	15	25	33
Minimum Recommended Mounting Height	(m)	6	11	14
Maximum Recommended Mounting Height	(m)	11	18	25
Minimum Wall Clearance	(m)	1.75	1.75	1.75
Minimum Roof Clearance	(m)	1	1	1

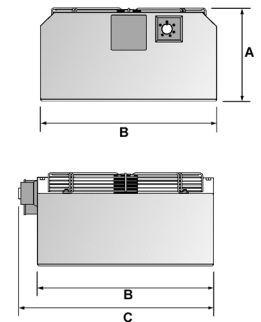

Construction - HVE Range

Casing - 'Zintec' zinc-coated steel with polyester powder finish

External - rotor motor housing integral impeller blades - die-cast aluminium with polyester powder finish


Fan guard - welded wire fabrication with polyester powder finish • Outlet grille - satin finish anodised aluminium

Technical Data - ESF Range

Model		ESF 14
Air Displacement	(m ³ /sec) (ft ³ /min)	5.0 10500
Motor Speed	(RPM)	220
Motor Size	(W)	63
Capacitor	(µF)	1.6
Electrical Supply		230 V/50 Hz/1 Ø
Starting Current	(A)	0.30
Running Current	(A)	0.22
Maximum Ambient Temperature	(°C)	40
Weight	(kg)	6.2

Dimensional Data - ESF Range

Model		ESF 14
'A' Sweep Diameter	(mm)	1400
'B' Drop Rod	(mm)	750
Maximum Recommended Mounting Height	(mm)	6.0
Minimum Recommended Mounting Height	(mm)	4.5
Minimum Wall Clearance	(m)	2.75
Minimum Roof Clearance	(m)	1

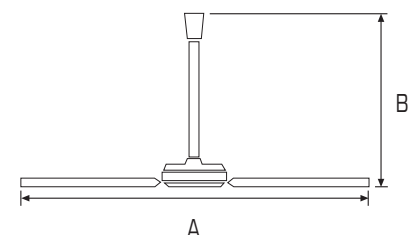

Construction ESF - Range

Fan blades, suspension rod and lower motor cover - all steel • Main motor housing - die cast aluminium • Finish to all parts - enamel

ESF FAN BENEFITS:


- Suitable for most commercial and industrial applications
- Keeps warmth at working level by moving warm air from high level and returning it to the occupied zone
- Provides savings up to 20% on running costs at optimum air change rate
- Reduced heat loss through the roof
- Improved comfort and faster heat recovery from uniform heating

HVE FAN BENEFITS:

- Returns warm air to ground level in high bay applications
- Directs air between racking from high levels


- Extends life of heating equipment thereby contributing directly to global environmental protection
- Protects ceiling finishes and lighting from thermal degradation
- Design flexibility
- More gentle and even air distribution pattern due to greater volume of air movement

- Includes thermostat

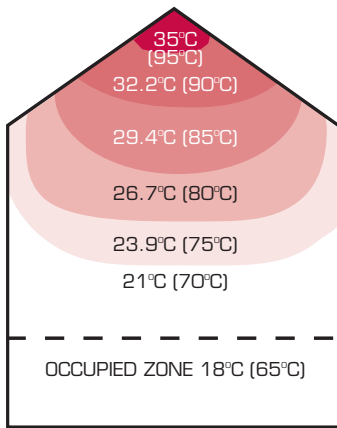

Problem

With any conventional heating system, natural convection increases the temperature gradient. This results in the ambient temperature at the apex of the roof being greater than the required design temperature in the occupied zone at floor level.

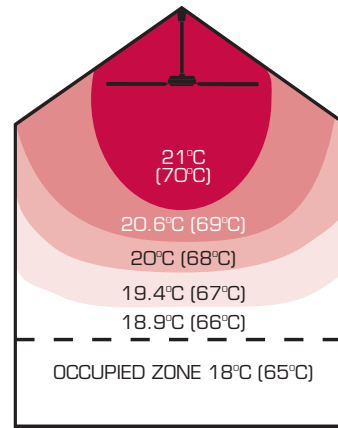

Solution

By using a system of destratification fans, the hot air in the roof space is directed down to the required area, thus reducing the heating load.

General Design Guide

At the survey stage, care should be taken to ensure that the air, which has convected to high level, is of sufficient quality to be returned to floor level. Additionally, the fan unit should not be sited in an area where there are aggressive or corrosive vapours which may attack the fan components. The fan units should not be sited where the air flow might adversely affect the operation of heating, ventilating or other process equipment.

ESF fans are most commonly installed in conjunction with a speed controller which is used to adjust the fan speed to provide optimum effect and comfort.

HVE fans are most commonly installed in conjunction with an ON/OFF control which utilises the fan's built in thermostat to operate the fan when heat is available and are used mainly in high bay areas.

The design specifications for energy saving fan installations will depend upon the size and shape of the heated space.

When designing the system, calculate the number of fans based on the air exchange rate within the heated space.

Then aim at positioning the fans to create an even distribution with relationship to the size and shape of the floor.

Design Guide - 'ESF' Fans (ESF 14 Fans)

To determine the number of fans required by air change over rate:

1. Calculate the volume of the building in cubic meters.
2. Multiply by 8 and divide by 17,820 (fan air displacement in m³/hour).

Design Guide - 'HVE' Fans

To determine the number of fans required:

First calculate one third of the building volume:

$$i.e. \frac{L \times W \times \text{Average Height}}{3} \quad m^3 = \text{FIG. 1}$$

Assume a displacement of 5 air changes per hour, so:

$$\text{Result of FIG. 1} \times 5 \quad m^3/hr = \text{FIG. 2}$$

As the fan performance data is in m³/sec:

$$\frac{\text{Result of FIG. 2}}{3600} \quad m^3/sec = \text{FIG. 3}$$

The number of fans required is:

$$\frac{\text{Result of FIG. 3}}{1.14} \quad \text{or HVE 400 fans,}$$

or

$$\frac{\text{Result of FIG. 3}}{1.77} \quad \text{for HVE 450 fans,}$$

or

$$\frac{\text{Result of FIG. 3}}{3.0} \quad \text{for HVE 650 fans,}$$

Round up to the nearest whole number to give the number of fans required.

Control Options

Manual on/off - all models

Manual adjustment of fan speed to suit prevailing conditions - WAC6, BP6 & FMP10 models

Automatic adjustment of fan speed according to roof-space temperature - BJ8



Selection Details - Controls

Model		WAC6	BP6	FMP10	BJ8
Control Unit Capacity (No. of fans)	ESF	6	10	20	20*
	HVE400	1	4	8	8
	HVE450	NA	1	2	2
	HVE650	NA	1	2	2
Manual On/Off		Yes	Yes	Yes	Yes
Manual Fan Speed Adjustment		Yes	Yes	Yes	No
Automatic Fan Speed Adjustment		No	No	No	Yes
Maximum Fan Speed Override		No	Yes	Yes	Yes
Fans 'ON' Neon Indicator		Yes	No	Yes	No
Temperature Sensor Range	(°C)	na	na	na	0-40
Temperature Sensor Cable Length	(m)	na	na	na	10
Maximum Starting Current	(A)	3	10	20	20
Maximum Running Current	(A)	1.5	5	10	10

*Note: A minimum of 10 ESF fans is required for the BJ8 Controller to function correctly.

Dimension Data - Controls

Model		WAC6	BP6	FMP10	BJ8
Width	(mm)	85	90	168	168
Depth (Box Only)	(mm)	50	45	107	107
Depth (Including Switches)	(mm)	55	55	125	125
Height	(mm)	85	150	80	220
Mounting Holes -					
Horizontal Distance - Between Centres	(mm)	60	na	na	155
Vertical Distance - Between Centres	(mm)	60	130	150	203

Installation Code and Annual Inspections:

All installations and service of ROBERTS GORDON® products must be performed by a contractor qualified in the installation and service of products sold and supplied by Roberts-Gordon and conform to all requirements set forth in the ROBERTS GORDON® manuals and all applicable governmental authorities pertaining to the installation, service and operation of the equipment. To help facilitate optimum performance and safety, Roberts-Gordon recommends that a qualified contractor annually inspect your ROBERTS GORDON® products and perform service where necessary, using only ROBERTS GORDON® replacement parts.

Further Information: Applications, engineering and detailed guidance on systems design, installation and product performance is available through ROBERTS GORDON® representatives. Please contact us for any further information you may require, including the Installation, Commissioning, Operation and Service Manual.

This product is not for residential use.

This document is intended to assist licensed professionals in the exercise of their professional judgement.

Roberts-Gordon Europe Limited

Oxford Street
 Bilston, West Midlands WV14 7EG UK
 Telephone: +44(0) 1902 494425
 Fax: +44(0) 1902 403200
 Service Telephone: +44(0) 1902 498733
 Service Fax: +44(0) 1902 401464
 E-mail: uksales@rg-inc.com
 E-mail: export@rg-inc.com

www.rog-inc.com

Corporate Headquarters (USA):

Roberts-Gordon, LLC
 Telephone: +1 716.852.4400
 Fax: +1 716.852.0854